




Colour included  
in the price


design: Jacek Ryń

## Connections:


A ↓ 510÷1860:



A ↓ 780÷1860:



Electric radiators:



## We recommend:

A set of integrated thermostatic valves with immersion tube for S1 and S8 connections



Integrated pipe-masking set



ZIP H hanger



## Specifications:












Working pressure: 0,8 MPa    Maximum operating temperature: 82°C

A ↓	B ↔	C3 [mm]	C5 [mm]	75/65/20°C [W]	55/45/20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm³]	 [kg]	Product Code <small>Configuration codes: 5</small>
510	500	470	-	304	164	300	470	360	75	1,76	6,37	WZCIN051050
510	600	470	-	362	195	400	570	360	75	1,96	7,31	WZCIN051060
780	500	740	500	455	245	400	470	630	75	2,74	9,77	WZCIN078050
780	600	740	500	541	291	600	570	630	75	3,06	11,23	WZCIN078060
1050	500	1010	500	600	323	600	470	900	75	3,72	13,17	WZCIN105050
1050	600	1010	500	714	384	800	570	900	75	4,16	15,14	WZCIN105060
1320	500	1280	500	739	397	800	470	1170	75	4,71	16,57	WZCIN132050
1320	600	1280	500	879	473	800	570	1170	75	5,25	19,08	WZCIN132060
1590	500	1550	500	887	476	800	470	1440	75	5,59	19,56	WZCIN159050
1590	600	1550	500	1055	566	1000	570	1440	75	6,23	22,49	WZCIN159060
1860	500	1820	500	1032	553	1000	470	1710	75	6,67	23,45	WZCIN186050









Colour included  
in the price

## Available sizes:

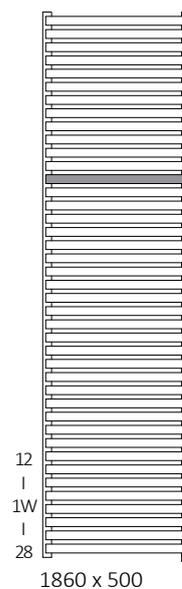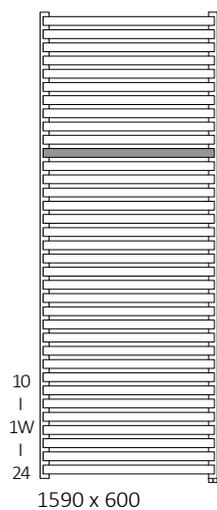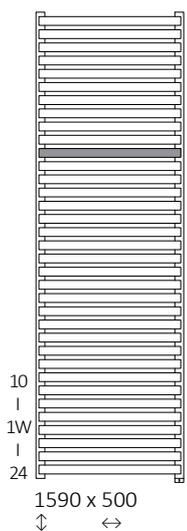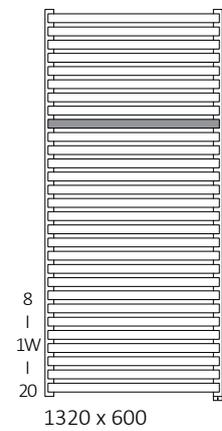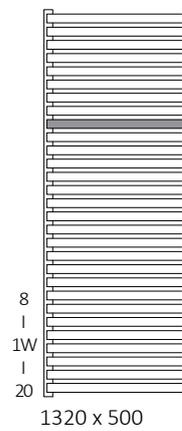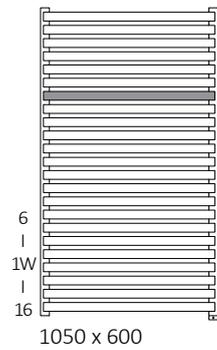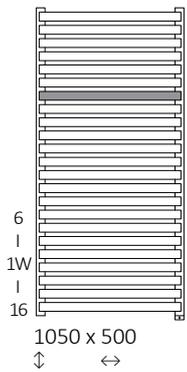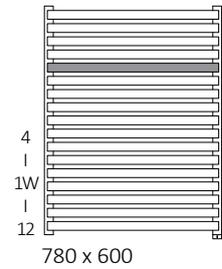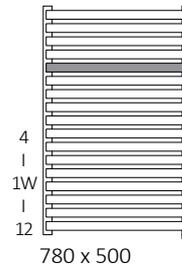





Colour included  
in the price

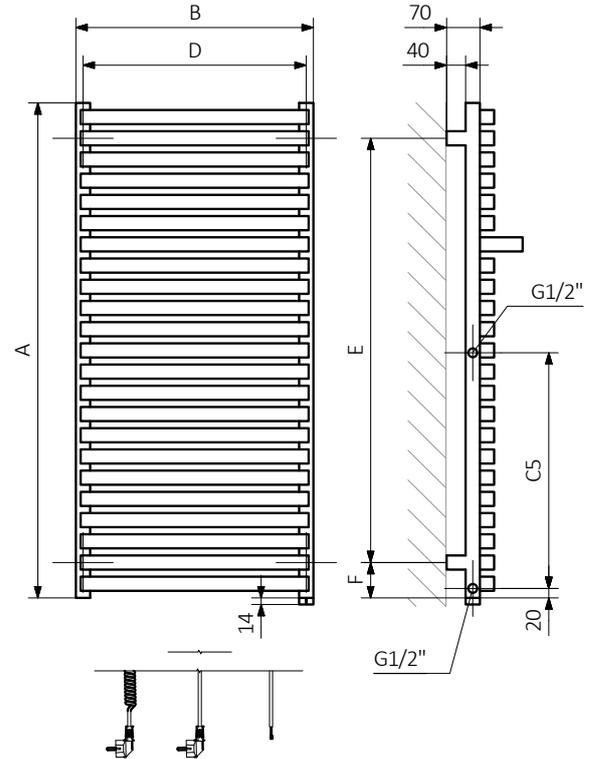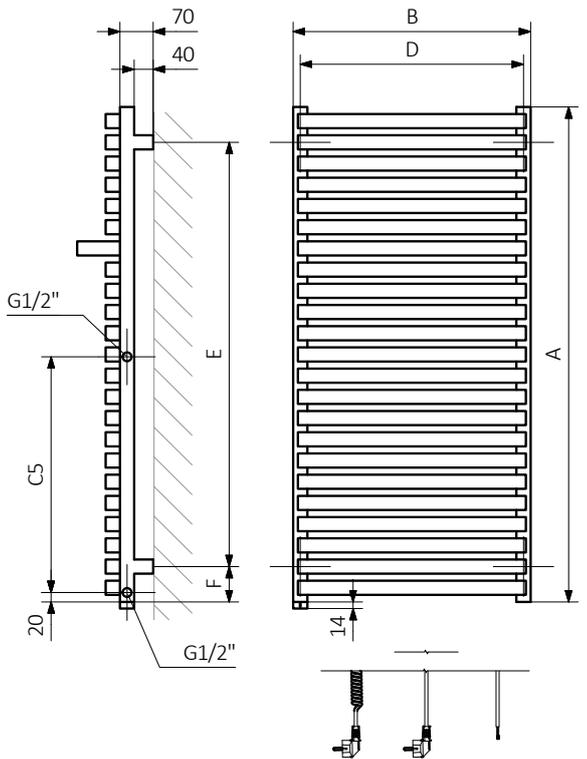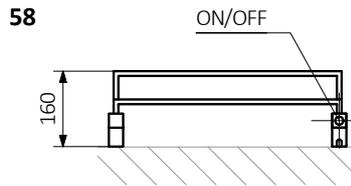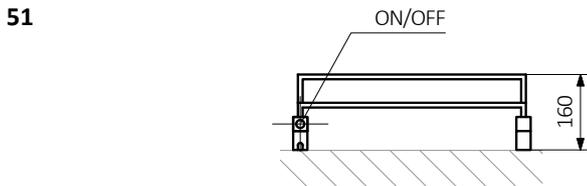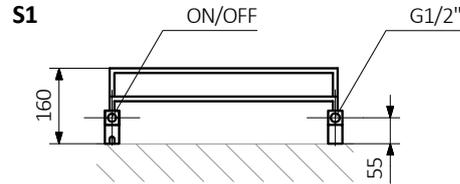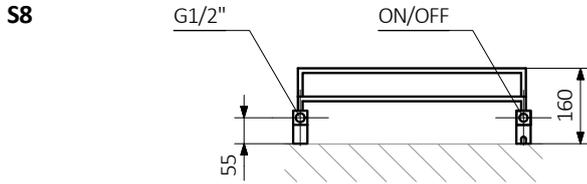

A — Height B — Width C1-C5 — Distance between pipe centres D — Horizontal distance between mounting bracket centres  
E — Vertical distance between mounting brackets F — Distance between a mounting bracket and the bottom of the radiator

**Collector:**


**Profile:**






Colour included in the price

**P1**

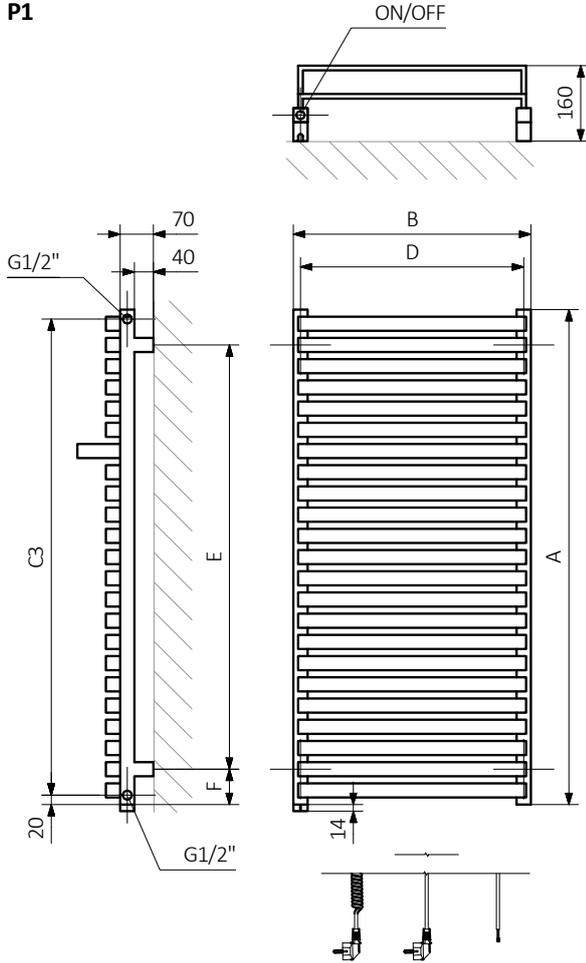


**L8**

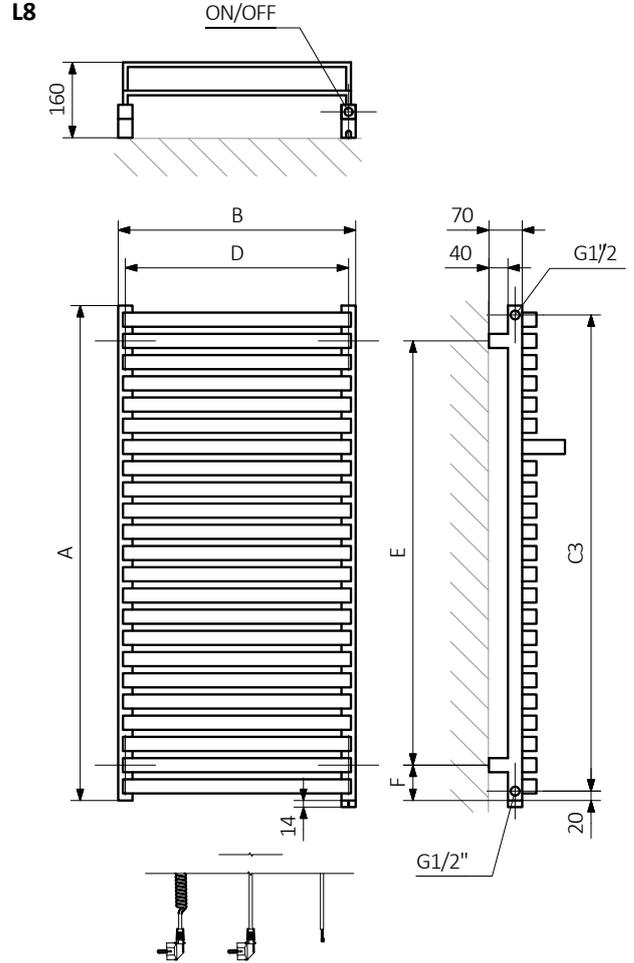

A — Height B — Width C1-C5 — Distance between pipe centres D — Horizontal distance between mounting bracket centres  
E — Vertical distance between mounting brackets F — Distance between a mounting bracket and the bottom of the radiator

**Collector:**

**Profile:**

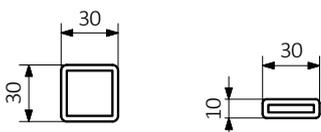



Colour included  
in the price

Product codes can be found in product data sheet tables. The codes provide some basic information about the product while a partially filled configuration code contains complementary information about the detailed specifications. When placing an order, product codes should include the fully completed configuration part. The configuration code part should be placed after the main product code. The main product code and configuration part will appear as shown in the example below:

## The Construction of the product and configuration code for a radiator with the built-in heating element ONE

WWBNN076050

K916E1W

PRODUCT CODE  
(located in the table for the product)

CONFIGURATION CODE  
(supplemented by hand)

### Configuration

K 916 E1 P

Package code   Colour code   Connection code   Type of heating element cable code  
*K – carton box*

### Zinc powder primer

**C** – Code of zinc powder primer is an extra processes

WLAL054030 K916SX **C** — *Extra processes or additions code*



Colour included  
in the price

## Legend



Available in chrome finish.



Radiator available in a “water” version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a ‘heating medium’ and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator.

The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.



Optional connections available for this radiator.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.