





design: *Terma*

Connections:

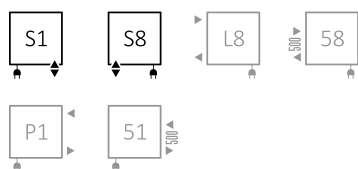

Electric radiators:




We recommend:

A set of integrated thermostatic valves with immersion tube for S1 and S8 connections



Integrated pipe-masking set






ZIP H hanger



Specifications:

Working pressure: 1,0 MPa Maximum operating temperature: 82°C


A ↓	B ↔	75/65/20°C [W]	55/45/20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm ³]	 [kg]	Product Code Configuration codes. 4
Powder coating										
600	430	244	134	300	400	450	75	1,50	4,83	WZMRN060043
600	530	301	165	300	500	450	75	1,69	5,71	WZMRN060053
600	630	358	196	400	600	450	75	1,88	6,58	WZMRN060063
780	430	319	172	300	400	630	75	2,05	6,61	WZMRN078043
780	530	393	212	400	500	630	75	2,32	7,83	WZMRN078053
780	630	467	252	400	600	630	75	2,58	9,05	WZMRN078063
1185	430	467	251	400	400	1035	75	3,19	10,21	WZMRN118043
1185	530	576	309	600	500	1035	75	3,61	12,11	WZMRN118053
1185	630	685	367	800	600	1035	75	4,02	14,01	WZMRN118063
1680	430	653	351	600	400	1530	75	4,61	14,67	WZMRN168043
1680	530	805	433	800	500	1530	75	5,22	17,43	WZMRN168053
1680	630	957	514	1000	600	1530	75	5,82	20,19	WZMRN168063
Plated finishes										
600	430	156	84	120	400	450	75	1,50	4,83	WZMRN060043
600	530	192	104	200	500	450	75	1,69	5,71	WZMRN060053
600	630	228	124	200	600	450	75	1,88	6,58	WZMRN060063
780	430	211	112	200	400	630	75	2,05	6,61	WZMRN078043
780	530	260	137	300	500	630	75	2,32	7,83	WZMRN078053
780	630	310	163	300	600	630	75	2,58	9,05	WZMRN078063
1185	430	323	162	300	400	1035	75	3,19	10,21	WZMRN118043
1185	530	398	199	400	500	1035	75	3,61	12,11	WZMRN118053
1185	630	473	237	600	600	1035	75	4,02	14,01	WZMRN118063
1680	430	462	217	600	400	1530	75	4,61	14,67	WZMRN168043
1680	530	570	267	600	500	1530	75	5,22	17,43	WZMRN168053
1680	630	677	317	800	600	1530	75	5,82	20,19	WZMRN168063

Marlin One


The radiator has a built-in ONE heating element.




Available sizes:




600 x 430
⇕ ⇔




600 x 530




600 x 630



780 x 430




780 x 530




780 x 630




1185 x 430
⇕ ⇔




1185 x 530




1185 x 630



1680 x 430
⇕ ⇔

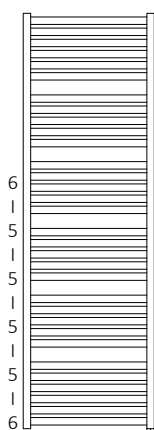

1680 x 530

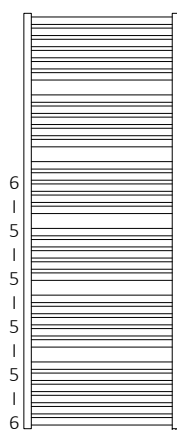


1680 x 630

Marlin One



The radiator has a built-in ONE heating element.



S8

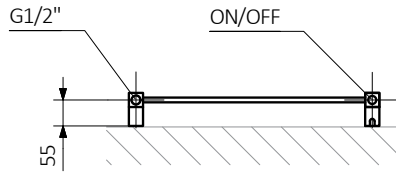


S1

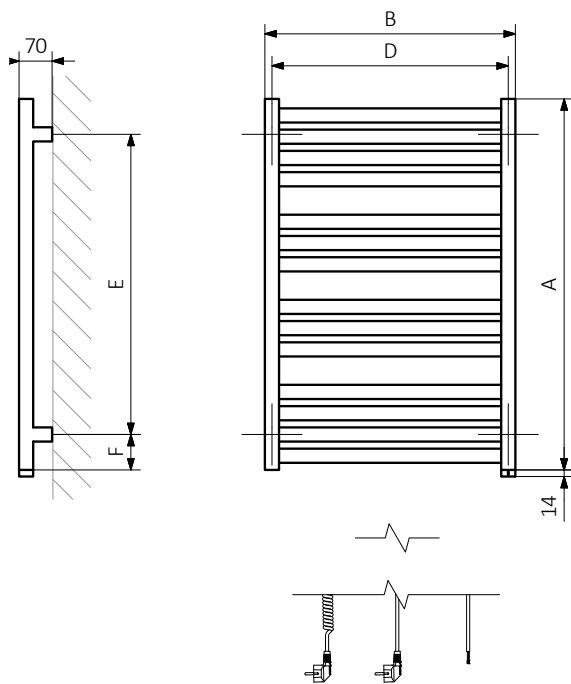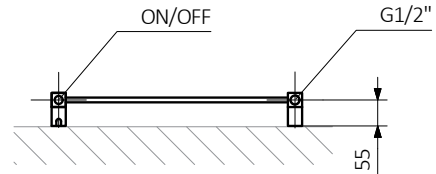

A — Height B — Width C1-C5 — Distance between pipe centres D — Horizontal distance between mounting bracket centres
E — Vertical distance between mounting brackets F — Distance between a mounting bracket and the bottom of the radiator

Collector:

Profile:





Product codes can be found in product data sheet tables. The codes provide some basic information about the product while a partially filled configuration code contains complementary information about the detailed specifications. When placing an order, product codes should include the fully completed configuration part. The configuration code part should be placed after the main product code. The main product code and configuration part will appear as shown in the example below:

The Construction of the product and configuration code for a radiator with the built-in heating element ONE

WWBNN076050

K916E1W

PRODUCT CODE
(located in the table for the product)

CONFIGURATION CODE
(supplemented by hand)

Configuration

K 916 E1 P

Package code Colour code Connection code Type of heating element cable code
K – carton box

Zinc powder primer

C – Code of zinc powder primer is an extra processes

WLAL054030 K916SX **C** — *Extra processes or additions code*



Legend



Available in chrome finish.



Radiator available in a "water" version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a 'heating medium' and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator.
The icon shows the flow and return connections for the radiator as well as the thermo-
static valve and heating element position if applicable.



Optional connections available for this radiator.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.