


Pier



colour included
in the price

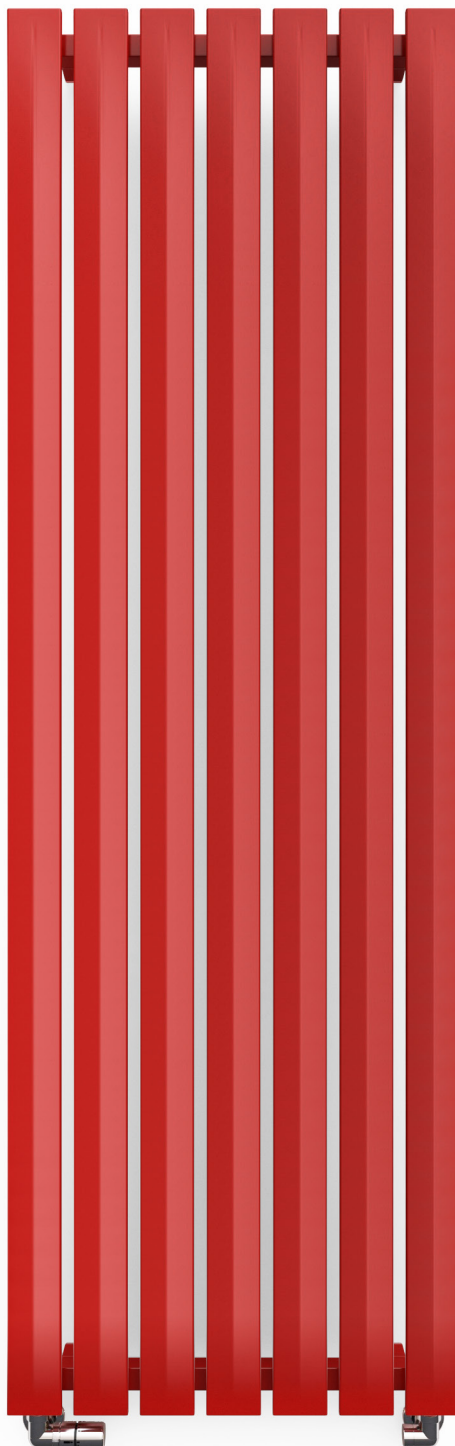


Pier 1800↓ × 580↔ SX
colour: RAL 3020


3-axis thermostatic valve set, left, chrome
Pipe-masking set, chrome



Connections:



Available sizes:

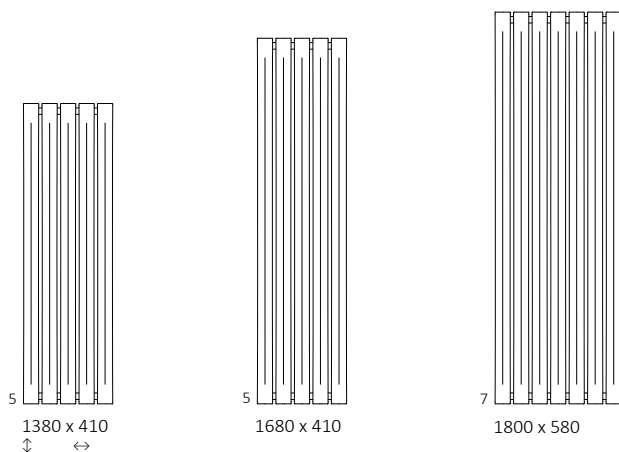


Specification:

Working pressure: 800 kPa Maximum operating temperature: 95°C


A ↓ [mm]	B ↔ [mm]	C1 [mm]	C2 [mm]	75/65/20°C [W]	55/45/20°C [W]	D [mm]	E [mm]	F [mm]	H [dm ²]	Weight [kg]	Product code Configuration code p. 4
1380	410	50	340	564	303	255	1310	35	6,81	18,16	WGB19138041
1680	410	50	340	687	360	255	1610	35	8,26	21,54	WGB19168041
1800	580	50	510	1030	532	425	1730	35	12,50	32,20	WGB19180058

Technical drawing:

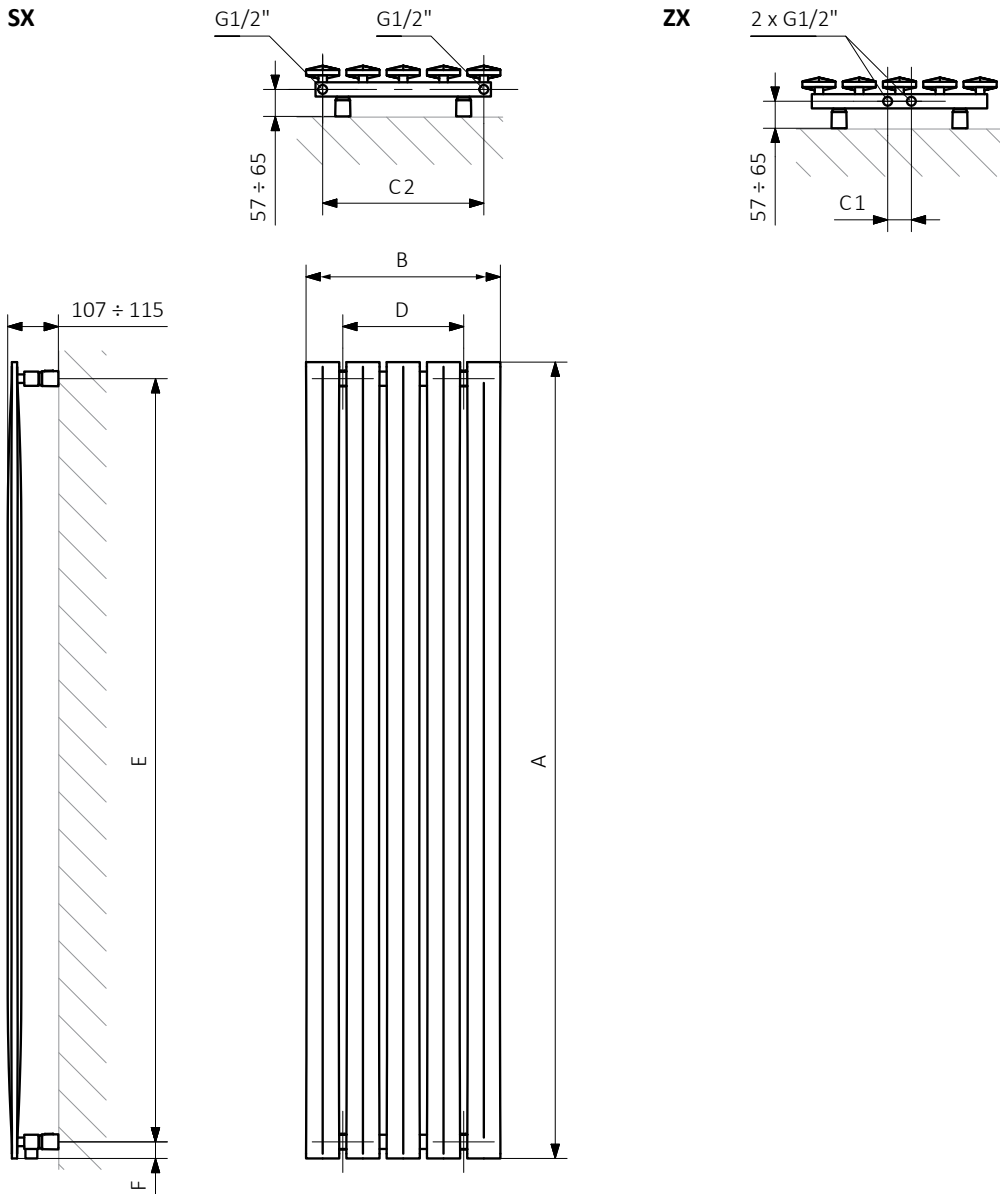

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres
E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector: **Pipe:**





Product codes can be found in product data sheet tables. The codes provide some basic information about the product while a partially filled configuration code contains complementary information about the detailed specifications. When placing an order, product codes should include the fully completed configuration part. The configuration code part should be placed after the main product code. The main product code and configuration part will appear as shown in the example below:

The construction of a water and dual fuel radiator product and configuration code:

WGB19138041

PRODUCT CODE
(located in the table for the product)

K916SX

CONFIGURATION CODE
(supplemented by hand)

Configuration

K **916** **SX**

Package code

Colour code

Connection code

K - carton box

Epoxy primery

E - Code of epoxy primer is an extra processes.

WGB19138041 K916SX **E** — *Extra processes or additions code*



Legend



Radiator available in a "water" version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a 'heating medium' and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator. The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.



Available in chrome finish.