

# Bone



Bone 1260 x 600  
colour: noble brown


Integrated thermostatic valve with immersion tube, angled, right, chrome  
SLIM thermostatic head, chrome  
REG 3 heating element, white

# Bone




design: Terma


## Connections:

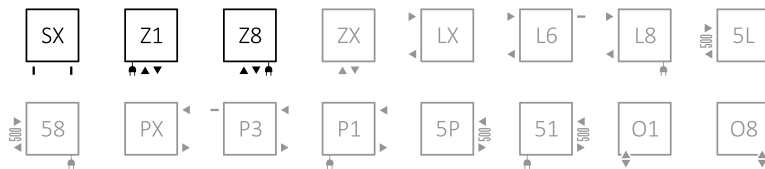

## Electric radiators:



## Available sizes:

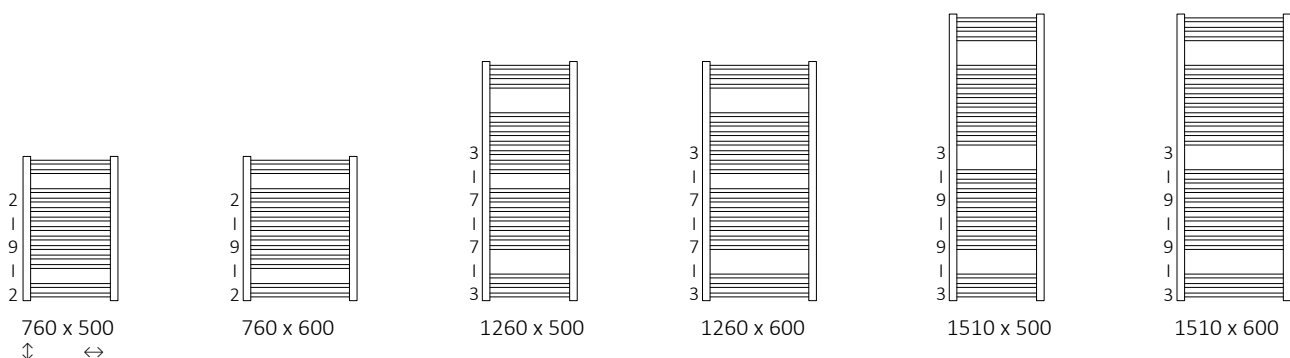


## Specifications:

Working pressure: 0,8 MPa    Maximum operating temperature: 95°C

A ↓	B ↔	C1 [mm]	C2 [mm]	75/65/20°C [W]	55/45/20°C [W]	☺ [W]	D [mm]	E [mm]	F [mm]	∩ [dm³]	📖 [kg]	Product Code <a href="#">Configuration codes: 4</a>
<b>Powder coating</b>												
760	500	50	460	320	173	300	460	580	90	3,09	7,09	WGBON076050
760	600	50	560	384	208	400	560	580	90	3,46	8,19	WGBON076060
1260	500	50	460	503	271	600	460	1080	90	4,93	11,06	WGBON126050
1260	600	50	560	603	325	600	560	1080	90	5,51	12,75	WGBON126060
1510	500	50	460	607	323	600	460	1330	90	5,92	13,22	WGBON151050
1510	600	50	560	728	387	800	560	1330	90	6,61	15,24	WGBON151060
<b>Plated finishes</b>												
760	500	50	460	224	121	200	460	580	90	3,09	7,09	WGBON076050
760	600	50	560	269	145	300	560	580	90	3,46	8,19	WGBON076060
1260	500	50	460	352	190	400	460	1080	90	4,93	11,06	WGBON126050
1260	600	50	560	422	227	400	560	1080	90	5,51	12,75	WGBON126060
1510	500	50	460	425	226	400	460	1330	90	5,92	13,22	WGBON151050
1510	600	50	560	510	271	600	560	1330	90	6,61	15,24	WGBON151060


# Bone

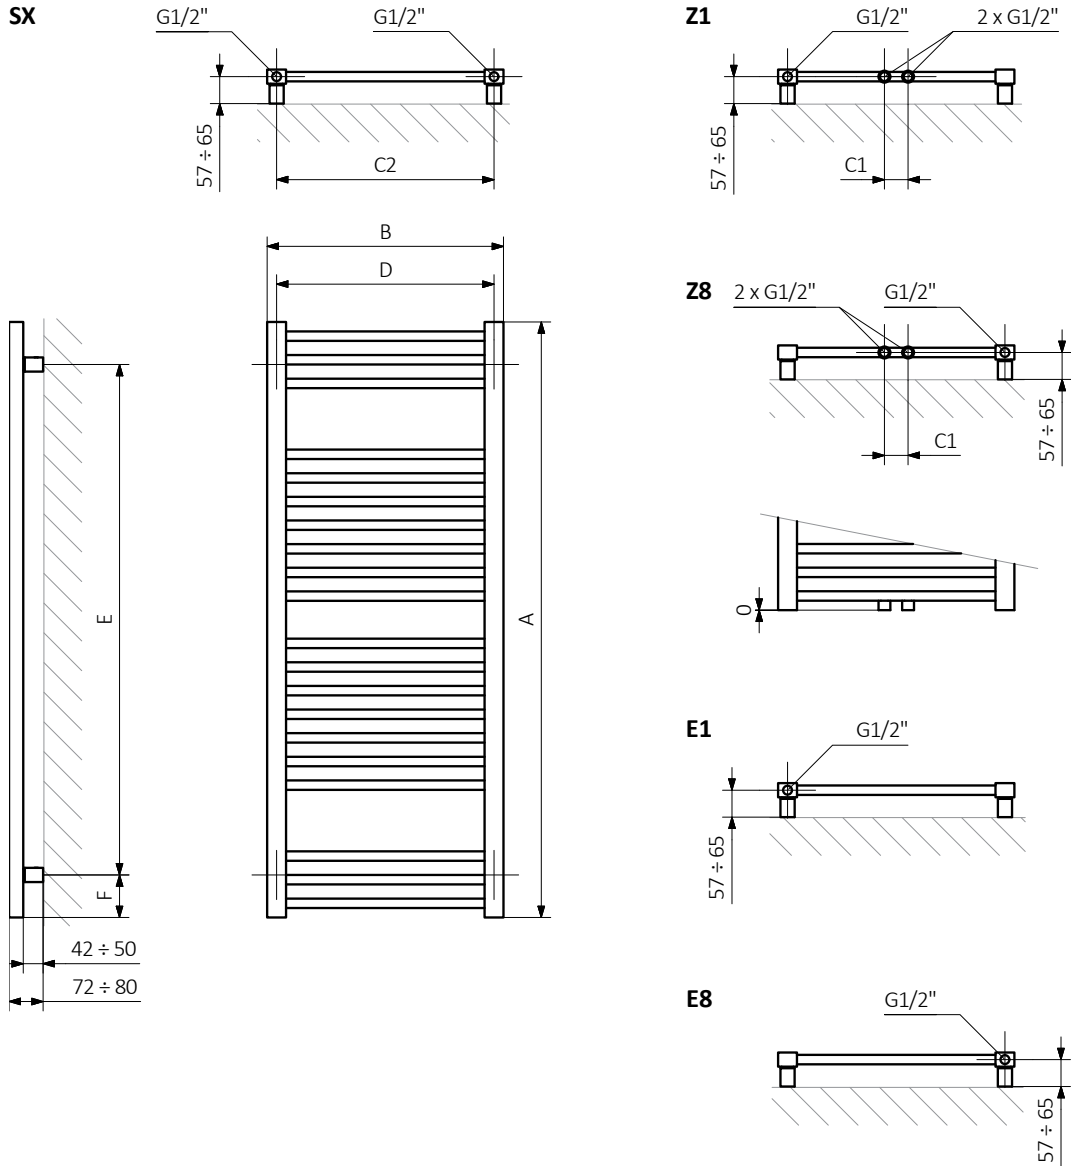

A — Height B — Width C1-C5 — Distance between pipe centres D — Horizontal distance between mounting bracket centres  
 E — Vertical distance between mounting brackets F — Distance between a mounting bracket and the bottom of the radiator

**Collector:**

**Profile:**





Product codes can be found in product data sheet tables. The codes provide some basic information about the product while a partially filled configuration code contains complementary information about the detailed specifications. When placing an order, product codes should include the fully completed configuration part. The configuration code part should be placed after the main product code. The main product code and configuration part will appear as shown in the example below:

The construction of a water and dual fuel radiator product and configuration code:

WGALE054030

PRODUCT CODE  
(located in the table for the product)

K916SX

CONFIGURATION CODE  
(supplemented by hand)

Configuration

K 916 SX

Package code   Colour code   Connection code  
*K – carton box*

Construction of electric heater configuration code

WLALE054030

PRODUCT CODE  
(located in the table for the product)

K916E1DRYM

CONFIGURATION CODE  
(supplemented by hand)

Configuration

K 916 E1 DRY M

Package code   Colour code   Connection code   Heating element code   Type of heating element cable code  
*K – carton box*

Zinc powder primer

**C** – Code of zinc powder primer is an extra processes

WLALE054030 K916SX **C** – Extra processes or additions code



## Legend



Available in chrome finish.



Radiator available in a “water” version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a ‘heating medium’ and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator.  
The icon shows the flow and return connections for the radiator as well as the thermostat valve and heating element position if applicable.



Optional connections available for this radiator.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.