


# City



Colour included  
in the price

  
**TERMA**  
SINCE 1990

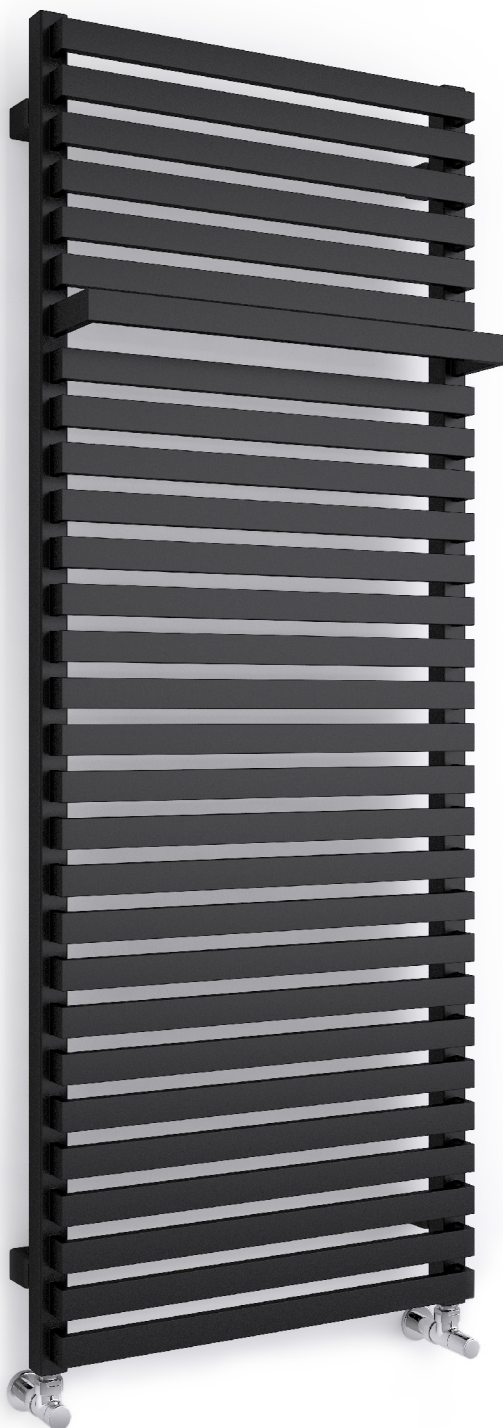

City 1050 x 500  
colour: RAL 7022

Angled lockshield valve, chrome  
Angled regulating valve, chrome




Colour included in the price

design: Jacek Ryń

## Connections:


A ↓ 510÷1860:

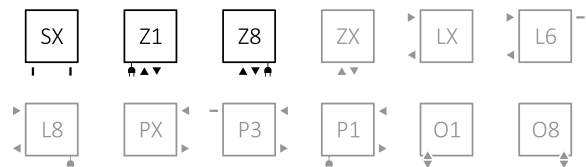


A ↓ 780-1860:



Electric radiators:



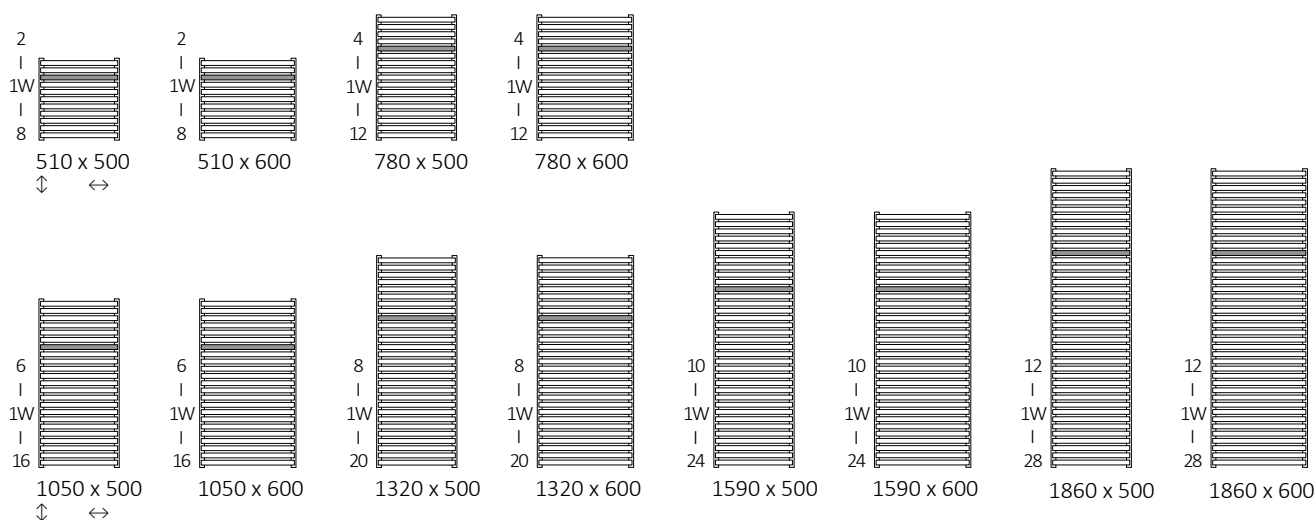


## Available sizes:






## Specifications:

Working pressure: 0,8 MPa Maximum operating temperature: 95°C

A ↓	B ↔	C1 [mm]	C2 [mm]	75/65/20°C [W]	55/45/20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm³]	 [kg]	Product Code <small>Configuration codes: 4</small>
510	500	50	470	304	164	300	470	330	90	1,82	6,37	WGCIT051050
510	600	50	570	362	195	400	570	330	90	2,03	7,31	WGCIT051060
780	500	50	470	455	245	400	470	600	90	2,81	9,77	WGCIT078050
780	600	50	570	541	291	600	570	600	90	3,13	11,23	WGCIT078060
1050	500	50	470	600	323	600	470	870	90	3,79	13,17	WGCIT105050
1050	600	50	570	714	384	800	570	870	90	4,23	15,14	WGCIT105060
1320	500	50	470	739	397	800	470	1140	90	4,78	16,57	WGCIT132050
1320	600	50	570	879	473	800	570	1140	90	5,32	19,08	WGCIT132060
1590	500	50	470	887	476	800	470	1410	90	5,66	19,56	WGCIT159050
1590	600	50	570	1055	566	1000	570	1410	90	6,30	22,49	WGCIT159060
1860	500	50	470	1032	553	1000	470	1680	90	6,74	23,45	WGCIT186050
1860	600	50	570	1227	657	1200	570	1680	90	7,52	26,98	WGCIT186060




Colour included in the price

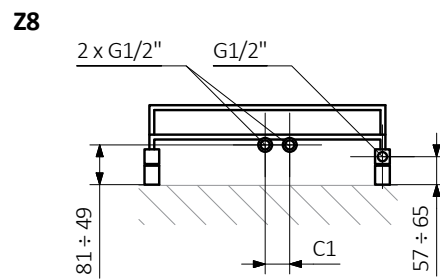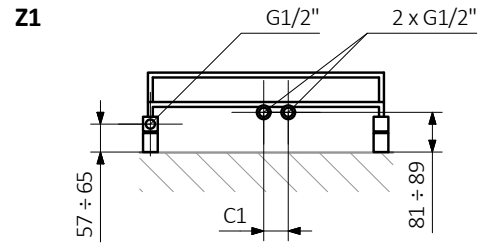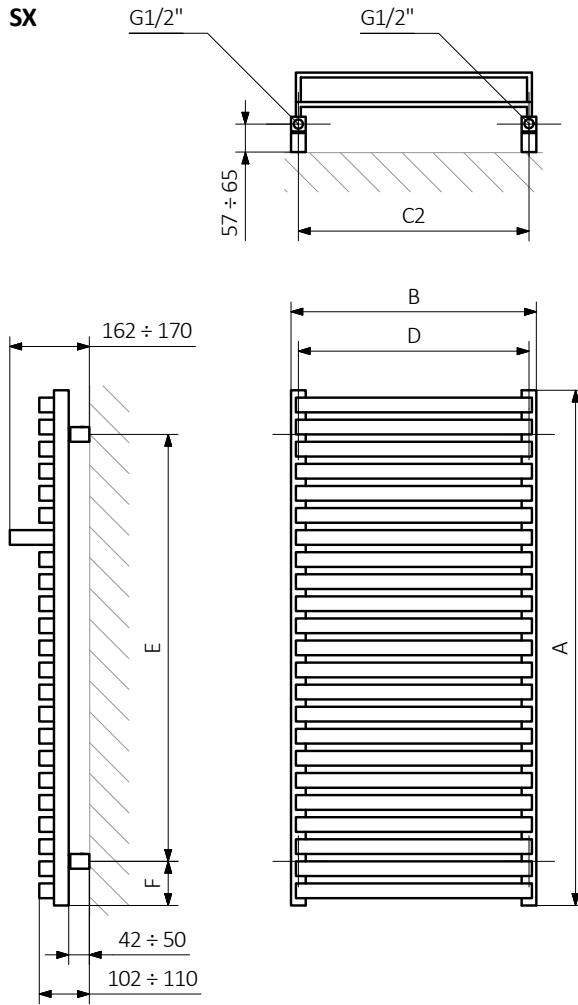

A — Height B — Width C1-C5 — Distance between pipe centres D — Horizontal distance between mounting bracket centres E — Vertical distance between mounting brackets F — Distance between a mounting bracket and the bottom of the radiator

**Collector:**

**Profile:**





Product codes can be found in product data sheet tables. The codes provide some basic information about the product while a partially filled configuration code contains complementary information about the detailed specifications. When placing an order, product codes should include the fully completed configuration part. The configuration code part should be placed after the main product code. The main product code and configuration part will appear as shown in the example below:

The construction of a water and dual fuel radiator product and configuration code:

WGALE054030

K916SX

PRODUCT CODE  
(located in the table for the product)

CONFIGURATION CODE  
(supplemented by hand)

Configuration

**K** **916** **SX**

Package code    Colour code    Connection code  
*K – carton box*

Construction of electric heater configuration code

WLALE054030

K916E1DRYM

PRODUCT CODE  
(located in the table for the product)

CONFIGURATION CODE  
(supplemented by hand)

Configuration

**K** **916** **E1** **DRY** **M**


Package code    Colour code    Connection code    Heating element code    Type of heating element cable code  
*K – carton box*

Zinc powder primer

**C** – Code of zinc powder primer is an extra processes

WLALE054030 K916SX **C** – Extra processes or additions code



 Colour included  
in the price

## Legend



Available in chrome finish.



Radiator available in a “water” version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a ‘heating medium’ and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator.  
The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.



Optional connections available for this radiator.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.