


Aero H



Colour included
in the price

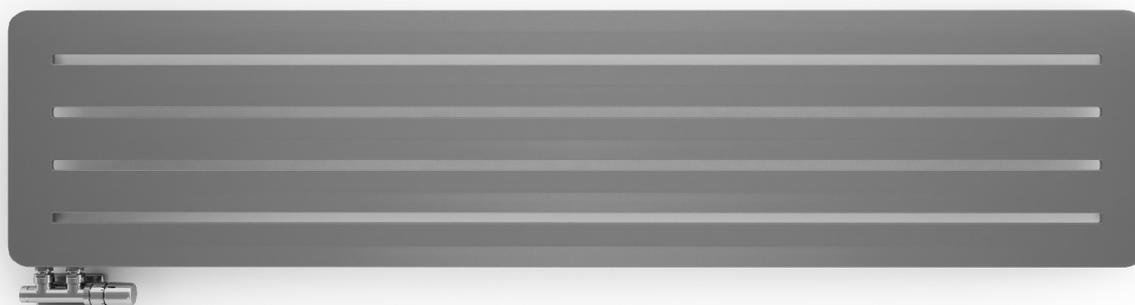

Aero H 410 x 1500
colour: storm sky

Integrated thermostatic valve, angled, left, chrome
SLIM thermostatic head, chrome
Integrated pipe-masking set, chrome


Aero H



Colour included
in the price

design: Jacek Ryń

Connections:

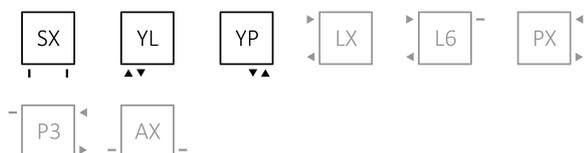

We recommend:


A set of integrated thermostatic valves
for YL and YP connections



Integrated
pipe-masking set



Available sizes:

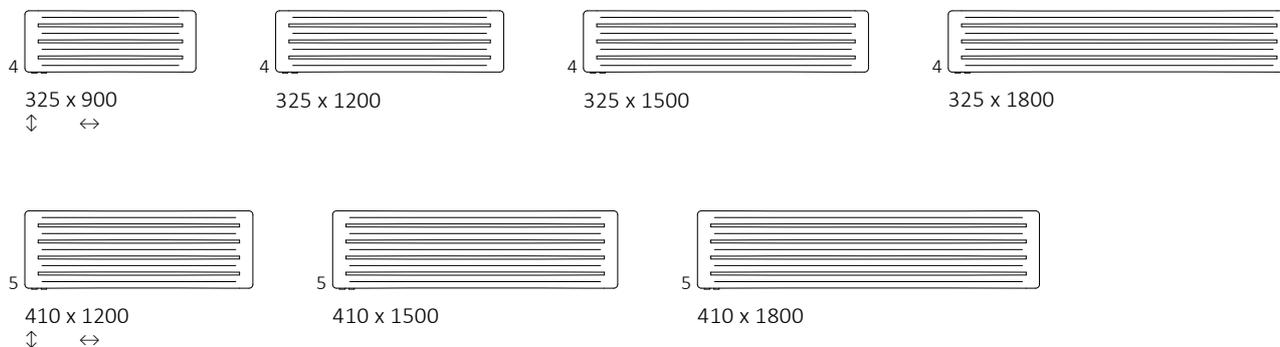

Specifications:

Working pressure: 0,7 MPa Maximum operating temperature: 95°C


A ↓	B ↔	C1 [mm]	C2 [mm]	75/65/20°C [W]	55/45/20°C [W]	D [mm]	E [mm]	F [mm]	H [dm³]	⚖️ [kg]	Product Code <small>Configuration codes: 4</small>
325	900	50	830	290	160	830	170	77,5	3,25	8,74	WGARH032090
325	1200	50	1130	388	214	1130	170	77,5	4,57	11,57	WGARH032120
325	1500	50	1430	485	267	1430	170	77,5	5,90	14,41	WGARH032150
325	1800	50	1730	582	320	1730	170	77,5	7,22	17,24	WGARH032180
410	1200	50	1130	480	265	1130	255	77,5	5,72	14,48	WGARH041120
410	1500	50	1430	600	330	1430	255	77,5	7,37	18,03	WGARH041150
410	1800	50	1730	720	396	1730	255	77,5	9,03	21,57	WGARH041180

Aero H




Colour included
in the price



YP

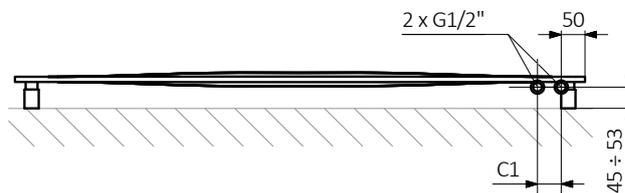

YL

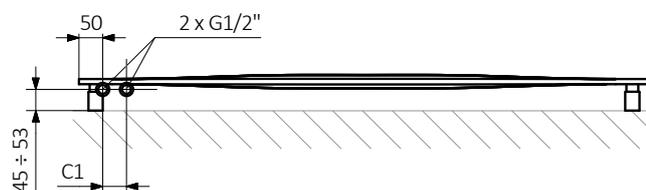


SX

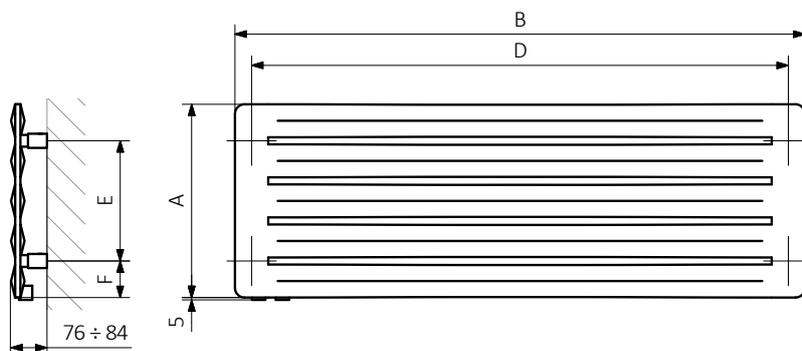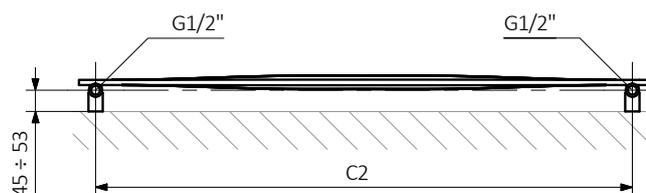

A — Height B — Width C1-C5 — Distance between pipe centres D — Horizontal distance between mounting bracket centres
E — Vertical distance between mounting brackets F — Distance between a mounting bracket and the bottom of the radiator

Profile:





Product codes can be found in product data sheet tables. The codes provide some basic information about the product while a partially filled configuration code contains complementary information about the detailed specifications. When placing an order, product codes should include the fully completed configuration part. The configuration code part should be placed after the main product code. The main product code and configuration part will appear as shown in the example below:

The construction of a water and dual fuel radiator product and configuration code:

WGALE054030

K916SX

PRODUCT CODE
(located in the table for the product)

CONFIGURATION CODE
(supplemented by hand)

Configuration

K 916 SX

Package code Colour code Connection code
K – carton box

Zinc powder primer

C – Code of zinc powder primer is an extra processes

WLALE054030 K916SX **C** — *Extra processes or additions code*

Aero H



Colour included
in the price

Legend



Available in chrome finish.



Radiator available in a “water” version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a ‘heating medium’ and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator.

The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.



Optional connections available for this radiator.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.