


# Intra



Colour included  
in the price

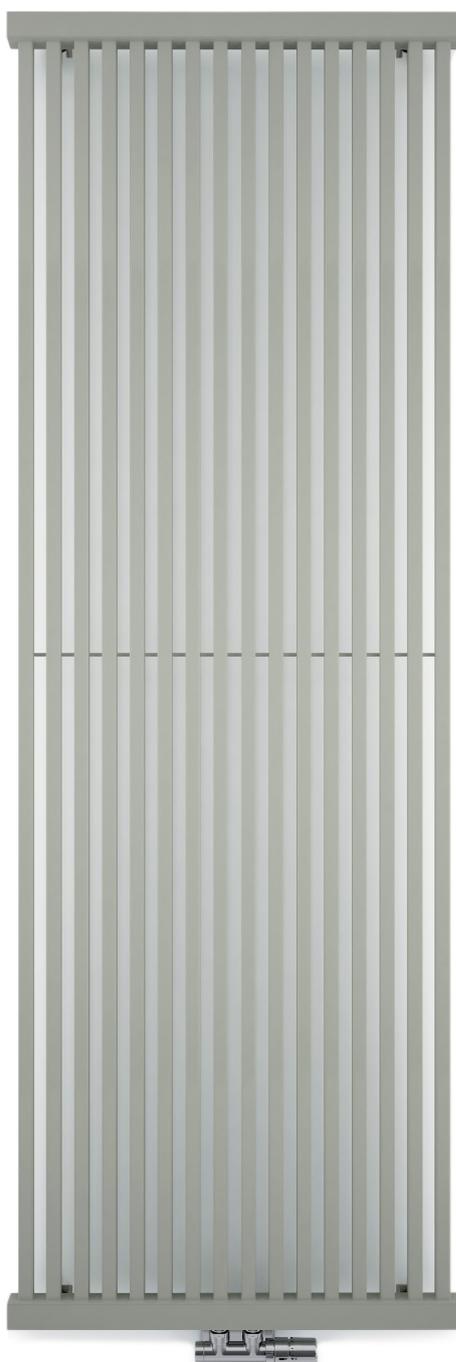

Intra 1700 x 650  
colour: RAL 7044


Integrated thermostatic valve, angled, left, chrome  
SLIM thermostatic head, chrome  
Integrated pipe-masking set, chrome



Colour included in the price

design: *Terma*

## Connections:

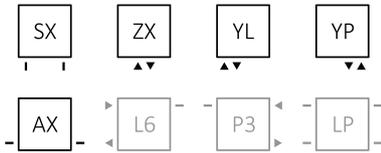

## We recommend:

Integrated thermostatic valve set for ZX, YL and YP connections




Integrated pipe-masking set



ZIP V hanger



## Available sizes:

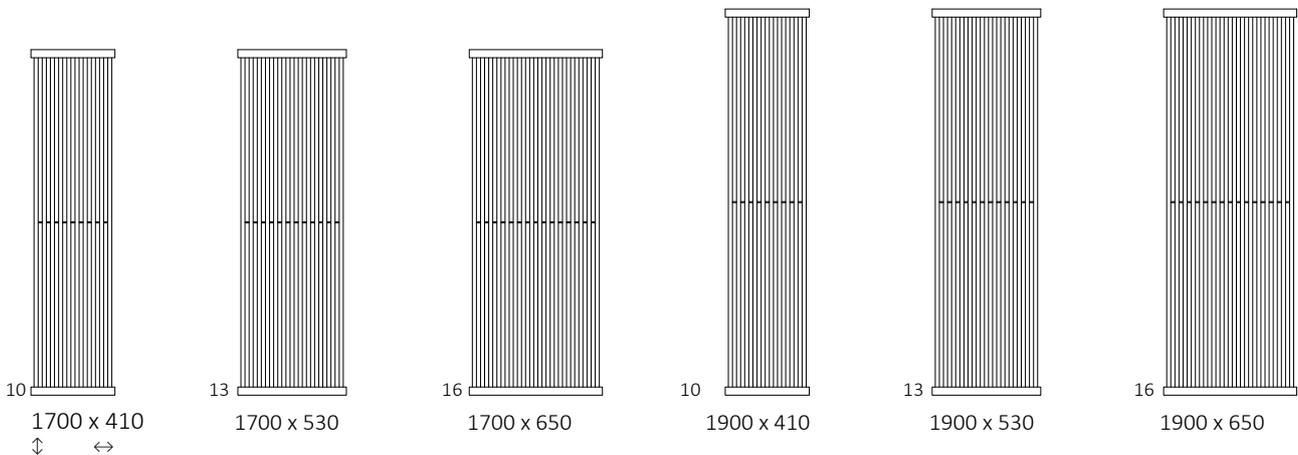






## Specifications:

Working pressure: 0,8 MPa    Maximum operating temperature: 95°C

A ↓	B ↔	C1 [mm]	C2 [mm]	C4 [mm]	75/65/20°C [W]	55/45/20°C [W]	D [mm]	E [mm]	F [mm]	[dm³]	[kg]	Product Code <span style="color: red;">Configuration codes: 4</span>
1700	410	50	370	410	660	337	270	1660	20	5,48	15,72	WGINB170041
1700	530	50	490	530	858	438	390	1660	20	7,11	20,33	WGINB170053
1700	650	50	610	650	1056	539	510	1660	20	8,75	24,94	WGINB170065
1900	410	50	370	410	756	385	270	1860	20	6,05	17,39	WGINB190041
1900	530	50	490	530	982	501	390	1860	20	7,86	22,50	WGINB190053
1900	650	50	610	650	1209	616	510	1860	20	9,67	27,62	WGINB190065




Colour included  
in the price

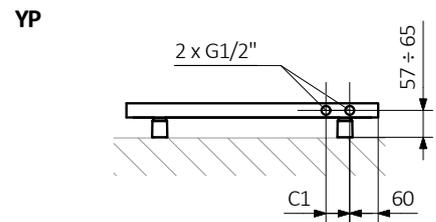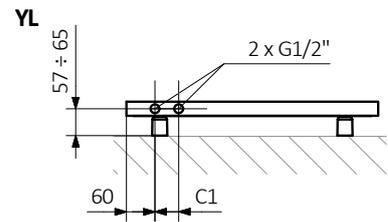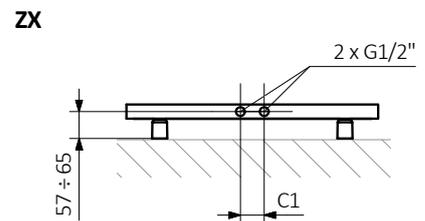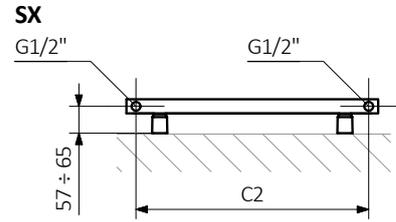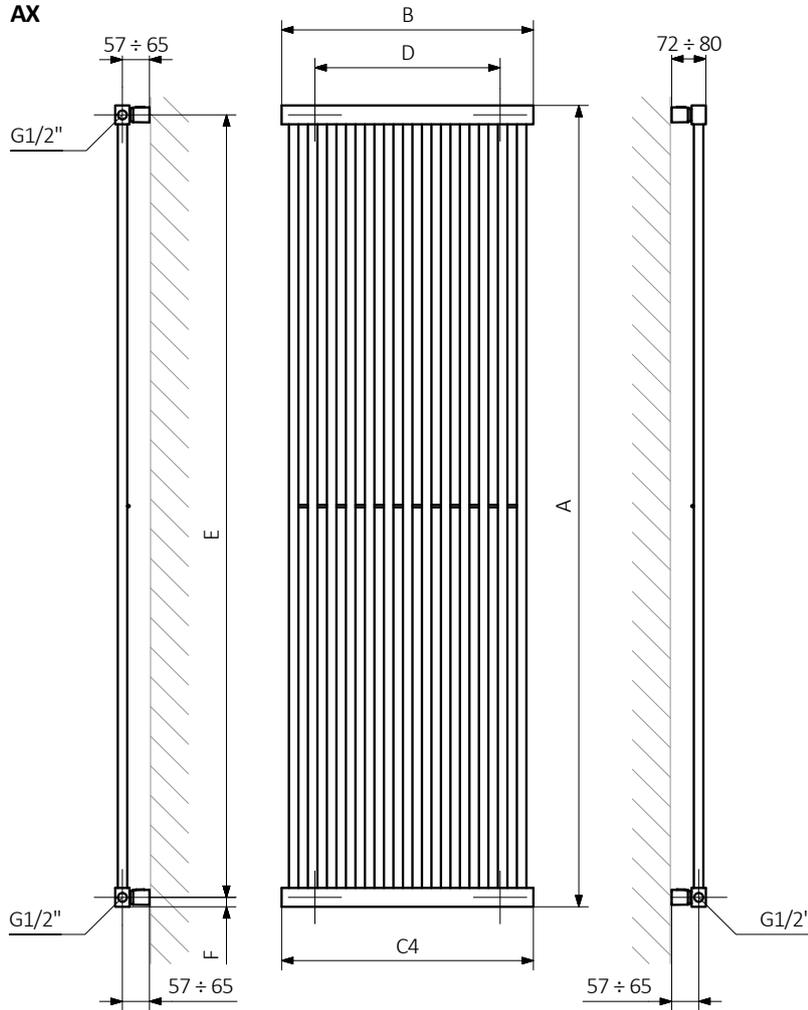

A — Height B — Width C1-C5 — Distance between pipe centres D — Horizontal distance between mounting bracket centres  
E — Vertical distance between mounting brackets F — Distance between a mounting bracket and the bottom of the radiator

**Collector:**

**Profile:**





Product codes can be found in product data sheet tables. The codes provide some basic information about the product while a partially filled configuration code contains complementary information about the detailed specifications. When placing an order, product codes should include the fully completed configuration part. The configuration code part should be placed after the main product code. The main product code and configuration part will appear as shown in the example below:

## The construction of a water radiator product and configuration code:

WGALE054030

PRODUCT CODE  
(located in the table for the product)

K916SX

CONFIGURATION CODE  
(supplemented by hand)

### Configuration

K 916 SX

Package code   Colour code   Connection code  
*K – carton box*

## Zinc powder primer

**C** – Code of zinc powder primer is an extra processes

WLALE054030 K916SX **C** — *Extra processes or additions code*

## Legend



Available in chrome finish.



Radiator available in a “water” version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a ‘heating medium’ and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator.  
The icon shows the flow and return connections for the radiator as well as the thermostat valve and heating element position if applicable.



Optional connections available for this radiator.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.