

Dexter Pro



Dexter Pro 1220 x 500
colour: RAL 3020

2 x Angled lockshield valve, chrome
NOBLE thermostatic head, chrome
KTX 2 heating element, chrome

Dexter Pro



Connections:




We recommend:

REG 2 heating element ZIP H hanger



Available sizes:

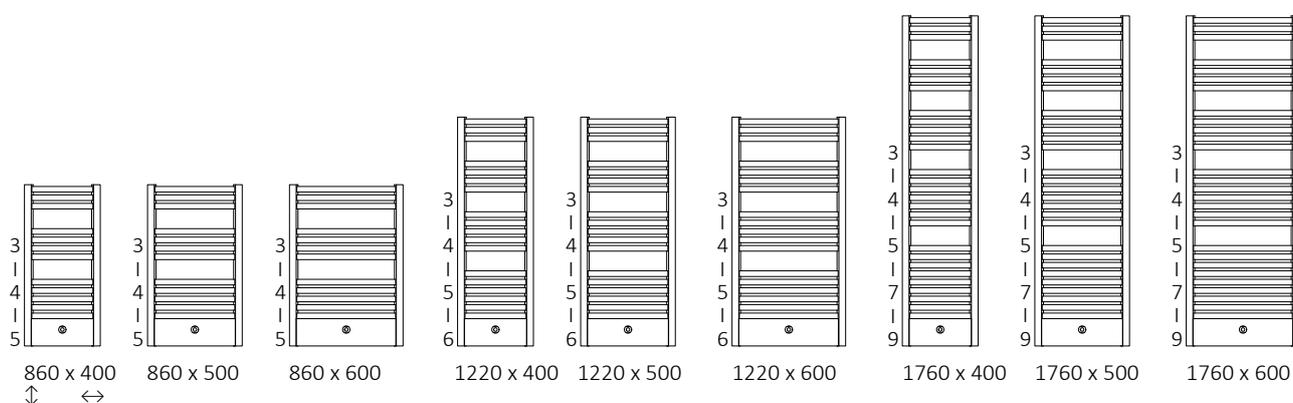

Specifications:

Working pressure: 0,8 MPa Maximum operating temperature: 95°C


A ↓	B ↔	C1 [mm]	75/65/20°C [W]	55/45/20°C [W]	[W]	D [mm]	E [mm]	F [mm]	[dm³]	[kg]	Product Code Configuration codes. 4
860	400	50	326	173	300	350	680	90	2,64	7,43	WGDEP086040
860	500	50	408	216	400	450	680	90	2,90	8,63	WGDEP086050
860	600	50	488	259	600	550	680	90	3,17	9,83	WGDEP086060
1220	400	50	429	232	400	350	1040	90	3,75	10,25	WGDEP122040
1220	500	50	536	289	600	450	1040	90	4,13	11,97	WGDEP122050
1220	600	50	645	348	600	550	1040	90	4,51	13,68	WGDEP122060
1760	400	50	601	323	600	350	1580	90	5,49	14,76	WGDEP176040
1760	500	50	751	403	800	450	1580	90	6,05	17,33	WGDEP176050
1760	600	50	900	483	1000	550	1580	90	6,62	19,91	WGDEP176060

Included components: The radiator is sold with two angled lockshield valves with male thread and NOBLE thermostatic head finished in chrome.




Dexter Pro



ZX

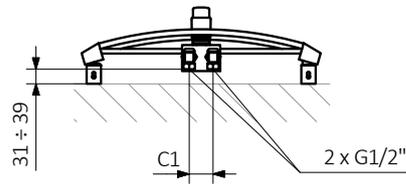



Z8

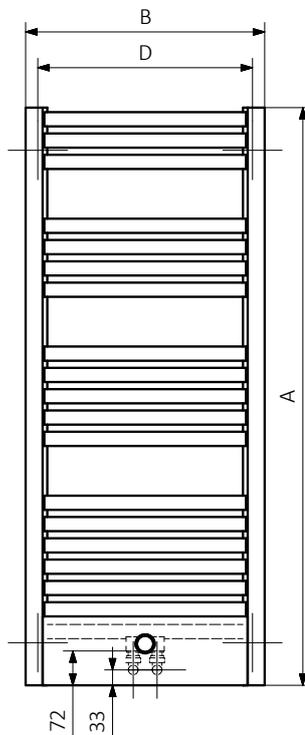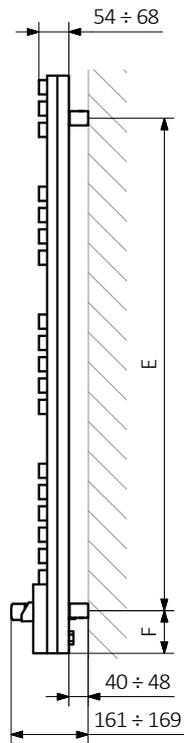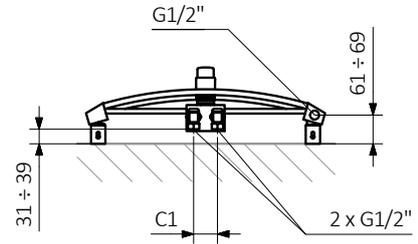

A — Height B — Width C1-C5 — Distance between pipe centres D — Horizontal distance between mounting bracket centres
E — Vertical distance between mounting brackets F — Distance between a mounting bracket and the bottom of the radiator

Collector:

Profile:





Product codes can be found in product data sheet tables. The codes provide some basic information about the product while a partially filled configuration code contains complementary information about the detailed specifications. When placing an order, product codes should include the fully completed configuration part. The configuration code part should be placed after the main product code. The main product code and configuration part will appear as shown in the example below:

The construction of a water and dual fuel radiator product and configuration code:

WGALE054030

K916SX

PRODUCT CODE
(located in the table for the product)

CONFIGURATION CODE
(supplemented by hand)

Configuration

K 916 SX

Package code Colour code Connection code
K – carton box

Zinc powder primer

C – Code of zinc powder primer is an extra processes

WLALE054030 K916SX **C** — *Extra processes or additions code*



Legend



Available in chrome finish.



Radiator available in a “water” version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a ‘heating medium’ and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator.
The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.



Optional connections available for this radiator.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.