


# Lima




Colour included  
in the price

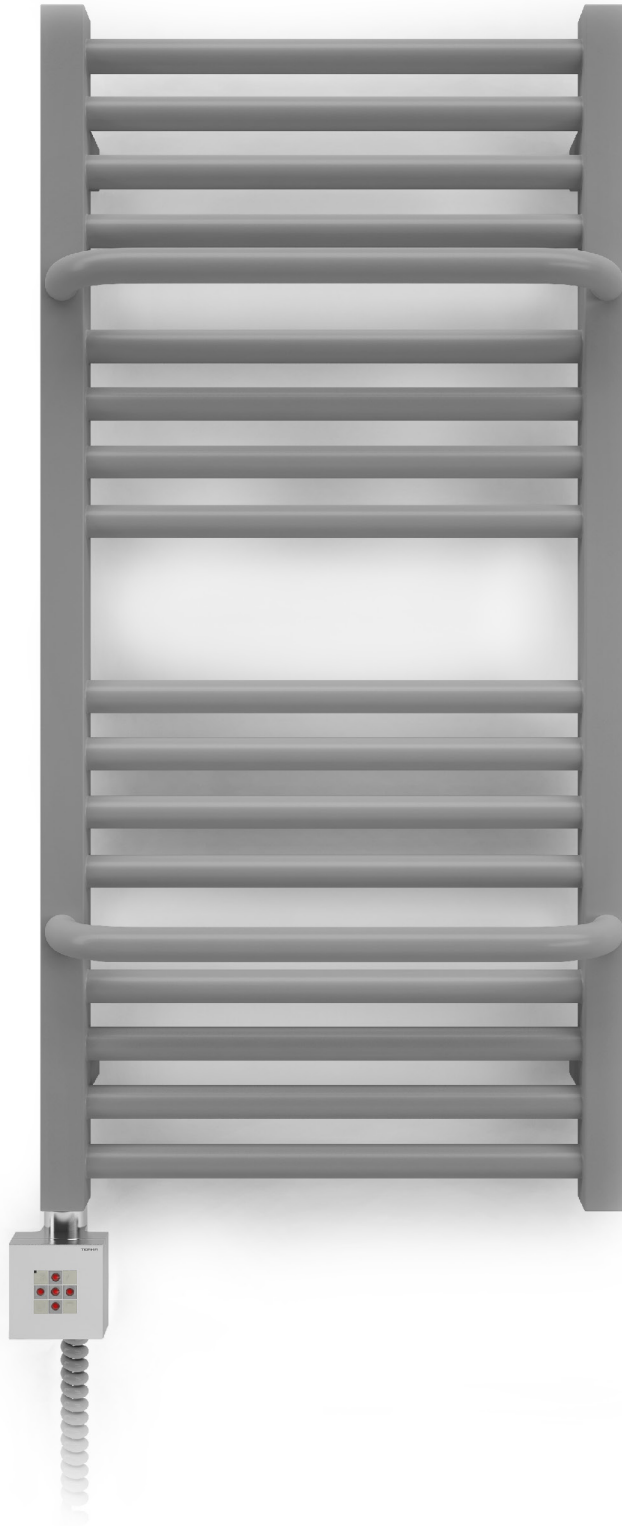


Lima 820 x 400  
colour: RAL 7042

KTX 2 heating element, chrome




## Connections:


A ↑ 300÷1700:

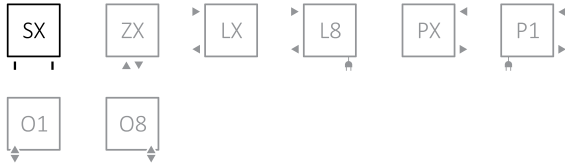


A ↓ 500÷1700:



A=820÷1700:



Electric radiators:




## We recommend:

Integrated thermostatic valve set for Z1 and Z8 connections



Integrated pipe-masking set



Zinc primer




ONE heating element






## Specifications:

Working pressure: 1,0 MPa    Maximum operating temperature: 95°C

A ↓	B ↔	C1 [mm]	C2 [mm]	75/65/20°C [W]	55/45/20°C [W]	☺ [W]	D [mm]	E [mm]	F [mm]	U [dm³]	⚖️ [kg]	Product Code <a href="#">Configuration codes: 7</a>
<b>Powder coating</b>												
300	1000	-	970	290	159	-	970	120	90	2,43	5,07	WGLIM030100
300	1200	-	1170	347	191	-	1170	120	90	2,85	5,96	WGLIM030120
300	1400	-	1370	405	223	-	1370	120	90	3,26	6,86	WGLIM030140
500	300	50	270	144	79	120	270	320	90	1,50	2,94	WGLIM050030
500	400	50	370	192	105	200	370	320	90	1,79	3,58	WGLIM050040
500	500	50	470	241	131	200	470	320	90	2,09	4,22	WGLIM050050
500	600	50	570	282	153	300	570	320	90	2,39	4,86	WGLIM050060
500	700	50	670	324	176	300	670	320	90	2,69	5,50	WGLIM050070
500	1000	50	970	482	262	400	970	320	90	3,59	7,43	WGLIM050100
500	1200	50	1170	578	314	600	1170	320	90	4,18	8,71	WGLIM050120
500	1400	50	1370	675	367	-	1370	320	90	4,78	9,99	WGLIM050140
820	300	50	270	244	132	300	270	640	90	2,53	4,94	WGLIM082030
820	400	50	370	325	175	300	370	640	90	3,07	6,10	WGLIM082040
820	500	50	470	406	218	400	470	640	90	3,61	7,25	WGLIM082050
820	600	50	570	477	256	400	570	640	90	4,15	8,40	WGLIM082060
820	700	50	670	547	293	600	670	640	90	4,68	9,55	WGLIM082070
1140	300	50	270	345	185	400	270	960	90	3,57	6,94	WGLIM114030



A ↓	B ↔	C1 [mm]	C2 [mm]	75/65/20°C [W]	55/45/20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm³]	 [kg]	Product Code <a href="#">Configuration codes. 7</a>
1140	400	50	370	460	247	400	370	960	90	4,35	8,61	WGLIM114040
1140	500	50	470	574	308	600	470	960	90	5,13	10,27	WGLIM114050
1140	600	50	570	675	361	800	570	960	90	5,90	11,94	WGLIM114060
1140	700	50	670	776	415	800	670	960	90	6,68	13,61	WGLIM114070
1460	300	50	270	449	240	400	270	1280	90	4,66	9,06	WGLIM146030
1460	400	50	370	599	319	600	370	1280	90	5,68	11,24	WGLIM146040
1460	500	50	470	748	399	800	470	1280	90	6,69	13,41	WGLIM146050
1460	600	50	570	879	468	800	570	1280	90	7,71	15,59	WGLIM146060
1460	700	50	670	1009	537	1000	670	1280	90	8,73	17,77	WGLIM146070
1700	300	50	270	527	280	600	270	1520	90	5,47	10,62	WGLIM170030
1700	400	50	370	703	374	800	370	1520	90	6,66	13,18	WGLIM170040
1700	500	50	470	878	466	800	470	1520	90	7,86	15,74	WGLIM170050
1700	600	50	570	1031	547	1000	570	1520	90	9,05	18,30	WGLIM170060
1700	700	50	670	1183	628	1200	670	1520	90	10,25	20,86	WGLIM170070


### Plated finishes

300	1000	-	970	203	104	-	970	120	90	2,43	5,07	WGLIM030100
300	1200	-	1170	243	124	-	1170	120	90	2,85	5,96	WGLIM030120
300	1400	-	1370	284	145	-	1370	120	90	3,26	6,86	WGLIM030140
500	300	50	270	101	51	120	270	320	90	1,50	2,94	WGLIM050030
500	400	50	370	134	69	120	370	320	90	1,79	3,58	WGLIM050040
500	500	50	470	169	86	200	470	320	90	2,09	4,22	WGLIM050050
500	600	50	570	197	101	200	570	320	90	2,39	4,86	WGLIM050060
500	700	50	670	227	116	200	670	320	90	2,69	5,50	WGLIM050070
500	1000	50	970	337	172	400	970	320	90	3,59	7,43	WGLIM050100
500	1200	50	1170	405	206	400	1170	320	90	4,18	8,71	WGLIM050120
500	1400	50	1370	473	241	400	1370	320	90	4,78	9,99	WGLIM050140
820	300	50	270	171	87	200	270	640	90	2,53	4,94	WGLIM082030
820	400	50	370	228	116	200	370	640	90	3,07	6,10	WGLIM082040
820	500	50	470	284	145	300	470	640	90	3,61	7,25	WGLIM082050
820	600	50	570	334	170	400	570	640	90	4,15	8,40	WGLIM082060
820	700	50	670	383	195	400	670	640	90	4,68	9,55	WGLIM082070
1140	300	50	270	242	123	300	270	960	90	3,57	6,94	WGLIM114030
1140	400	50	370	322	164	300	370	960	90	4,35	8,61	WGLIM114040
1140	500	50	470	402	205	400	470	960	90	5,13	10,27	WGLIM114050
1140	600	50	570	473	241	400	570	960	90	5,90	11,94	WGLIM114060
1140	700	50	670	543	277	600	670	960	90	6,68	13,61	WGLIM114070
1460	300	50	270	314	160	300	270	1280	90	4,66	9,06	WGLIM146030
1460	400	50	370	419	214	400	370	1280	90	5,68	11,24	WGLIM146040
1460	500	50	470	524	267	600	470	1280	90	6,69	13,41	WGLIM146050
1460	600	50	570	615	314	600	570	1280	90	7,71	15,59	WGLIM146060
1460	700	50	670	706	360	800	670	1280	90	8,73	17,77	WGLIM146070
1700	300	50	270	369	188	400	270	1520	90	5,47	10,62	WGLIM170030
1700	400	50	370	492	251	600	370	1520	90	6,66	13,18	WGLIM170040
1700	500	50	470	615	313	600	470	1520	90	7,86	15,74	WGLIM170050
1700	600	50	570	722	368	800	570	1520	90	9,05	18,30	WGLIM170060
1700	700	50	670	828	422	800	670	1520	90	10,25	20,86	WGLIM170070













Colour included in the price

## Available sizes:

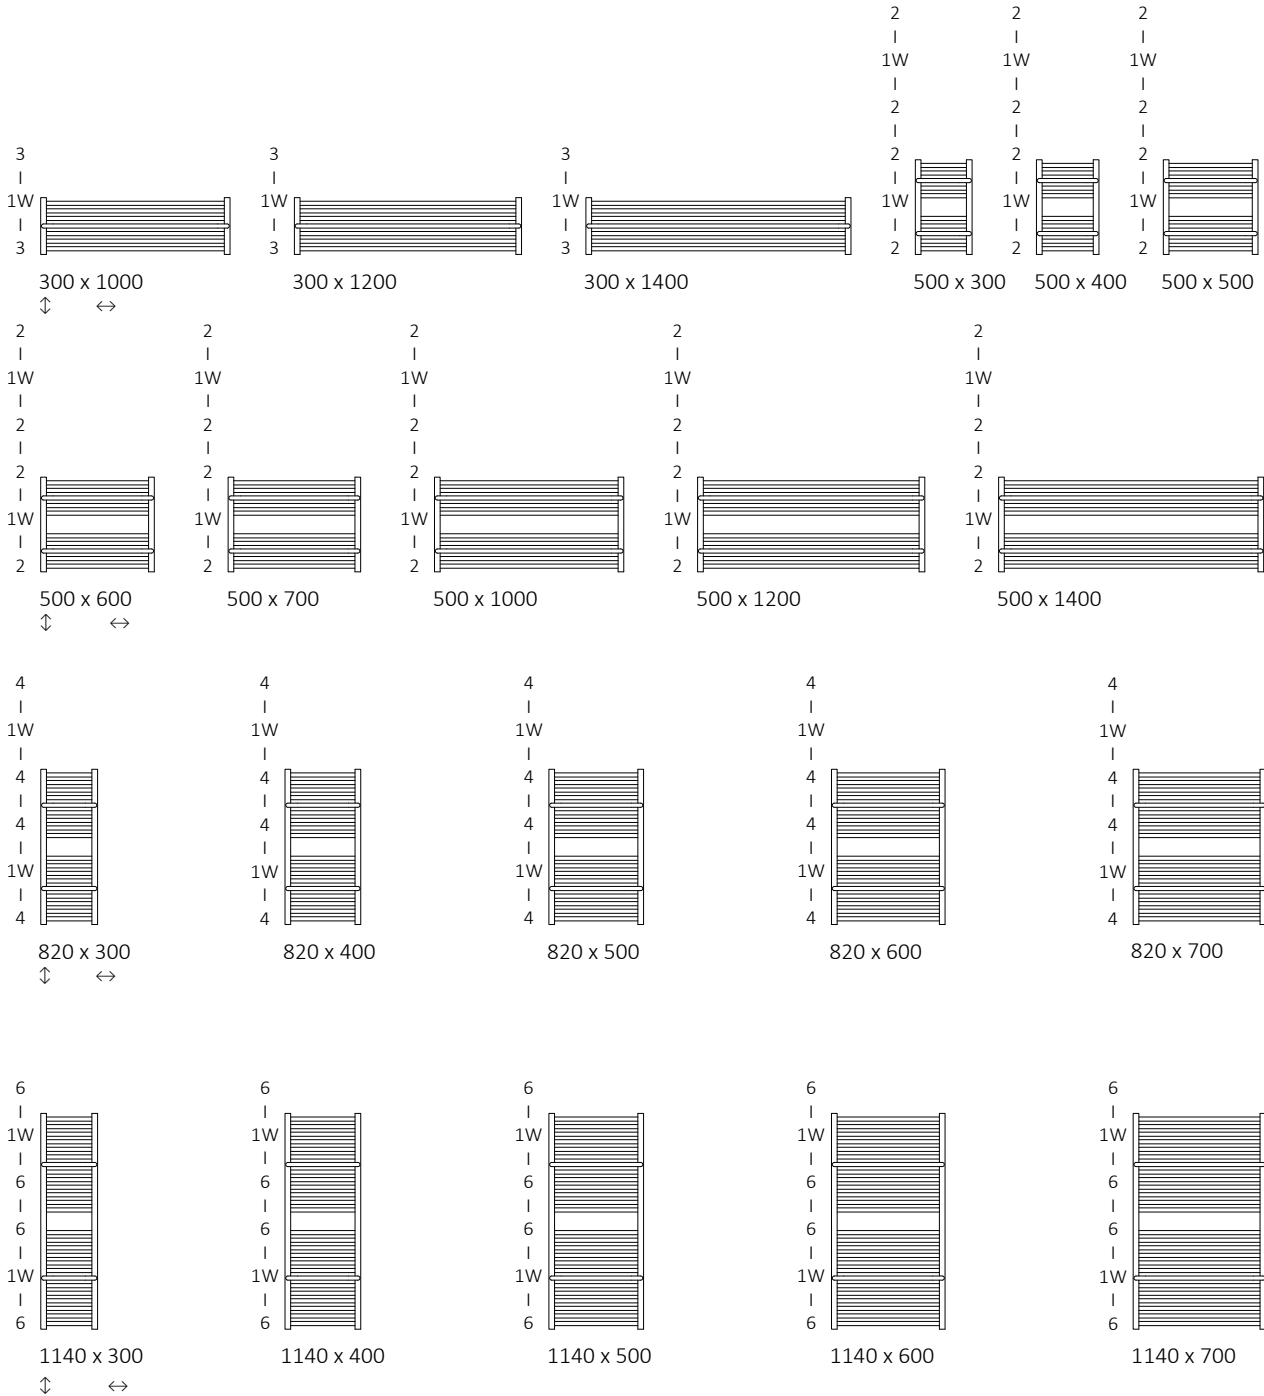







Colour included  
in the price

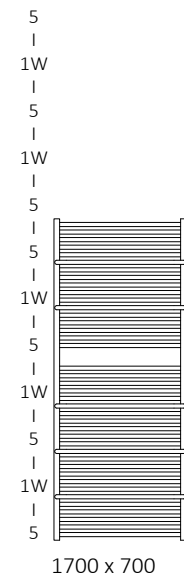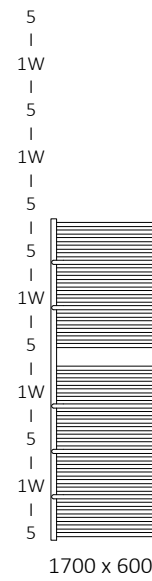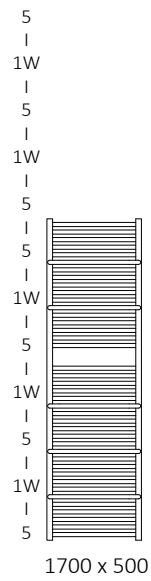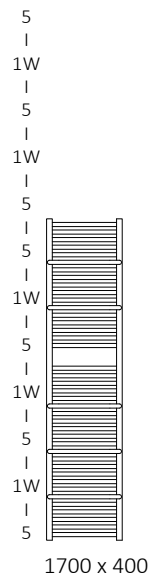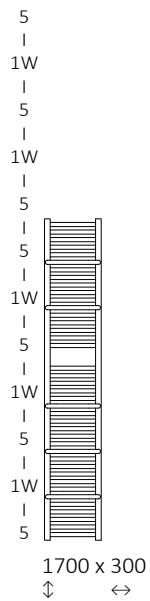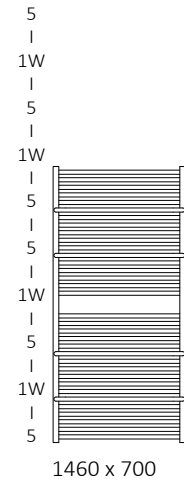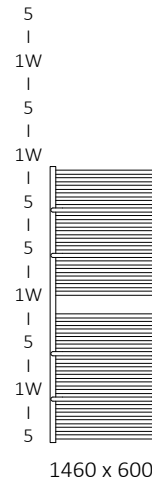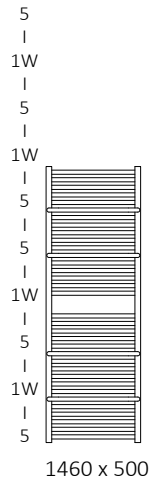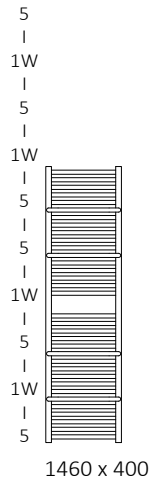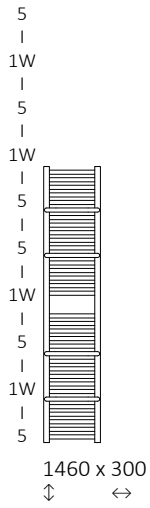





Colour included in the price

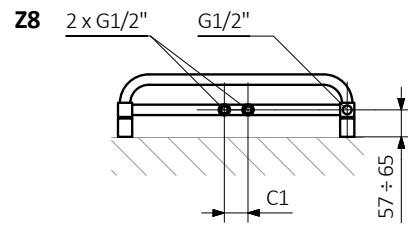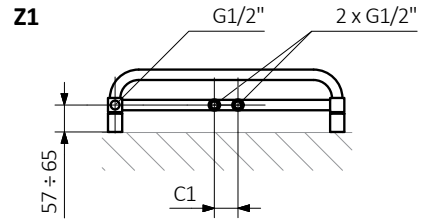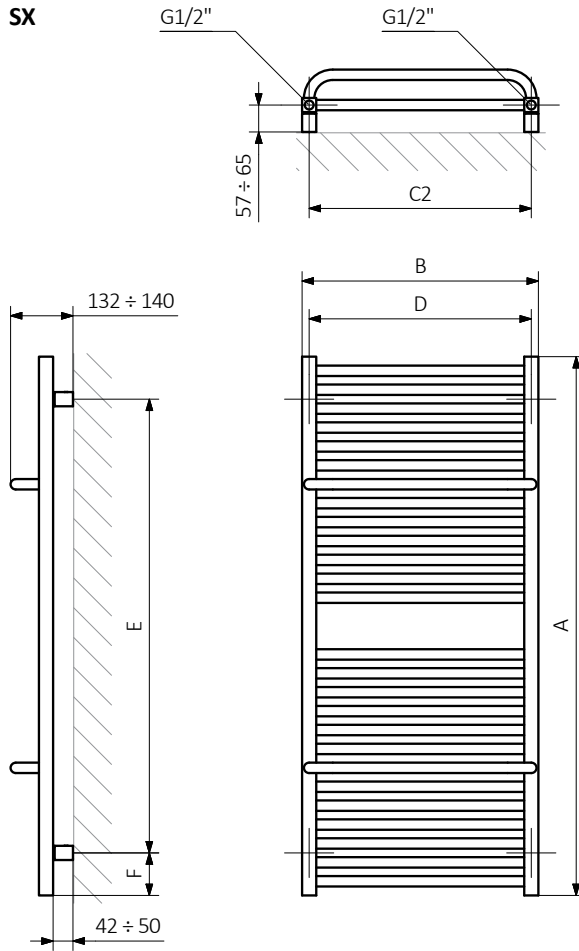


A — Height B — Width C1-C5 — Distance between pipe centres D — Horizontal distance between mounting bracket centres  
E — Vertical distance between mounting brackets F — Distance between a mounting bracket and the bottom of the radiator

**Collector:**

**Profile:**





Product codes can be found in product data sheet tables. The codes provide some basic information about the product while a partially filled configuration code contains complementary information about the detailed specifications. When placing an order, product codes should include the fully completed configuration part. The configuration code part should be placed after the main product code. The main product code and configuration part will appear as shown in the example below:

The construction of a water and dual fuel radiator product and configuration code:

WGALE054030

K916SX

PRODUCT CODE  
(located in the table for the product)

CONFIGURATION CODE  
(supplemented by hand)

Configuration

**K** **916** **SX**

Package code    Colour code    Connection code  
*K – carton box*

Construction of electric heater configuration code

WLALE054030

K916E1DRYM

PRODUCT CODE  
(located in the table for the product)

CONFIGURATION CODE  
(supplemented by hand)

Configuration


**K** **916** **E1** **DRY** **M**

Package code    Colour code    Connection code    Heating element code    Type of heating element cable code  
*K – carton box*

Zinc powder primer

**C** – Code of zinc powder primer is an extra processes

WLALE054030 K916SX **C** — *Extra processes or additions code*



## Legend



Available in chrome finish.



Radiator available in a "water" version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a 'heating medium' and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator.  
The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.



Optional connections available for this radiator.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.