



Colour included in the price

design: Terma

Connections:


A \updownarrow 435÷1635, B \leftrightarrow 230÷530:




A \updownarrow 435÷1635, B \leftrightarrow 430÷530:



A \updownarrow 735÷1635, B \leftrightarrow 230÷530:



Electric radiators:



We recommend:

3-axis regulating valve set for SX connection



Pipe-masking set, chrome






Zinc primer





Specifications:

Working pressure: 1,0 MPa Maximum operating temperature: 95°C

A \updownarrow	B \leftrightarrow	C2 [mm]	75/65/20°C [W]	55/45/20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm ³]	 [kg]	Product Code Configuration codes: 5	
Powder coating, B \leftrightarrow 430÷530												
435	430	400	203	106	200	400	255	90	1,25	3,48	WGMIK043043	
435	530	500	245	128	300	500	255	90	1,41	4,11	WGMIK043053	
735	430	400	337	176	400	400	555	90	2,07	5,68	WGMIK073043	
735	530	500	406	213	400	500	555	90	2,34	6,71	WGMIK073053	
1035	430	400	466	245	400	400	855	90	2,89	7,89	WGMIK103043	
1035	530	500	563	295	600	500	855	90	3,26	9,31	WGMIK103053	
1335	430	400	593	312	600	400	1155	90	3,71	10,09	WGMIK133043	
1335	530	500	715	376	800	500	1155	90	4,19	11,90	WGMIK133053	
1635	430	400	716	377	800	400	1455	90	4,53	12,30	WGMIK163043	
1635	530	500	864	454	800	500	1455	90	5,11	14,50	WGMIK163053	
Powder coating, B \leftrightarrow 230												
460	230	200	122	64	120	200	280	90	0,92	2,16	WGMIK046023	
710	230	200	185	97	200	200	530	90	1,40	3,25	WGMIK071023	
960	230	200	247	130	300	200	780	90	1,89	4,35	WGMIK096023	
1210	230	200	308	162	300	200	1030	90	2,38	5,45	WGMIK121023	
1460	230	200	367	193	400	200	1280	90	2,86	6,54	WGMIK146023	
1710	230	200	425	224	400	200	1530	90	3,35	7,64	WGMIK171023	



Colour included in the price

A ↓	B ↔	C2 [mm]	75/65/20°C [W]	55/45/20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	H [dm³]	 [kg]	Product Code	Configuration codes <?>
Plated finishes, B ↔ 430÷530												
435	430	400	142	72	120	400	255	90	1,25	3,48	WGMIK043043	
435	530	500	171	87	200	500	255	90	1,41	4,11	WGMIK043053	
735	430	400	236	120	200	400	555	90	2,07	5,68	WGMIK073043	
735	530	500	284	145	300	500	555	90	2,34	6,71	WGMIK073053	
1035	430	400	326	167	300	400	855	90	2,89	7,89	WGMIK103043	
1035	530	500	394	201	400	500	855	90	3,26	9,31	WGMIK103053	
1335	430	400	415	212	400	400	1155	90	3,71	10,09	WGMIK133043	
1335	530	500	501	255	600	500	1155	90	4,19	11,90	WGMIK133053	
1635	430	400	501	256	600	400	1455	90	4,53	12,30	WGMIK163043	
1635	530	500	605	308	600	500	1455	90	5,11	14,50	WGMIK163053	
Plated finishes, B ↔ 230												
460	230	200	85	44	120	200	280	90	0,92	2,16	WGMIK046023	
710	230	200	130	66	120	200	530	90	1,40	3,25	WGMIK071023	
960	230	200	173	88	200	200	780	90	1,89	4,35	WGMIK096023	
1210	230	200	216	110	200	200	1030	90	2,38	5,45	WGMIK121023	
1460	230	200	257	131	300	200	1280	90	2,86	6,54	WGMIK146023	
1710	230	200	298	152	300	200	1530	90	3,35	7,64	WGMIK171023	



Colour included in the price



Available sizes:





Colour included in the price



SX

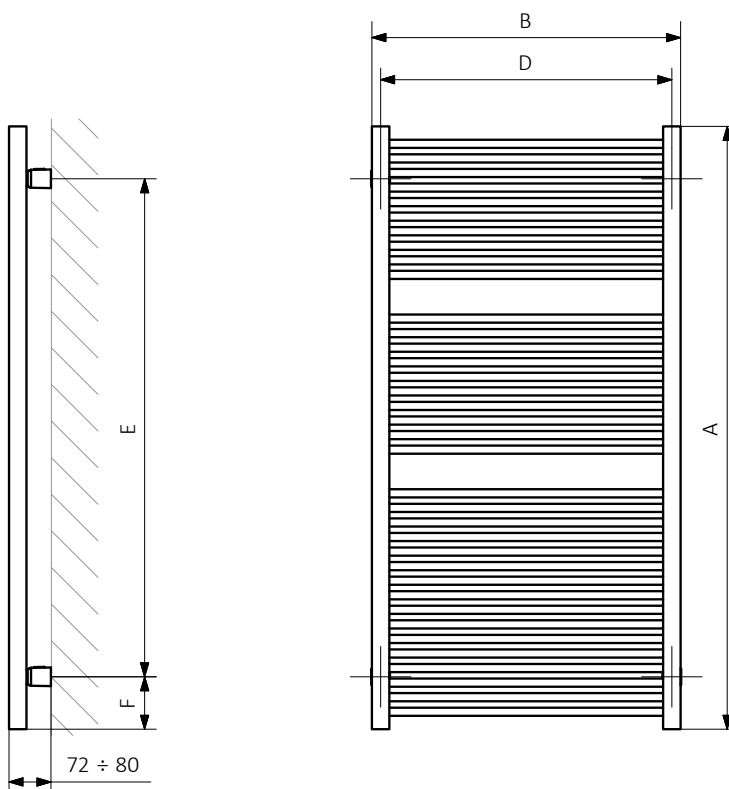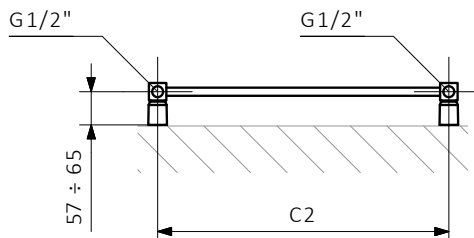


A — Height B — Width C1-C5 — Distance between pipe centres D — Horizontal distance between mounting bracket centres
E — Vertical distance between mounting brackets F — Distance between a mounting bracket and the bottom of the radiator

Collector:

Profile:





Product codes can be found in product data sheet tables. The codes provide some basic information about the product while a partially filled configuration code contains complementary information about the detailed specifications. When placing an order, product codes should include the fully completed configuration part. The configuration code part should be placed after the main product code. The main product code and configuration part will appear as shown in the example below:

The construction of a water and dual fuel radiator product and configuration code:

WGALE054030

K916SX

PRODUCT CODE
(located in the table for the product)

CONFIGURATION CODE
(supplemented by hand)

Configuration

K 916 SX

Package code Colour code Connection code
K – carton box

Construction of electric heater configuration code

WLALE054030

K916E1DRYM

PRODUCT CODE
(located in the table for the product)

CONFIGURATION CODE
(supplemented by hand)

Configuration


K 916 E1 DRY M

Package code Colour code Connection code Heating element code Type of heating element cable code
K – carton box

Zinc powder primer

C – Code of zinc powder primer is an extra processes

WLALE054030 K916SX **C** — *Extra processes or additions code*



Legend



Available in chrome finish.



Radiator available in a "water" version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a 'heating medium' and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator.
The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.



Optional connections available for this radiator.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.